

NEMA®|tiny

tiny - 3D GPU for superior wearable, small/mid-size display applications

NEMA®|t is the industry’s smallest Internet-of-Things (IoT) Graphics Processor Unit (GPU) with 3D functionality. The architecture of NEMA®|t has been specifically designed from bottom-up for the new generation of superior wearable and IoT display products which require great graphics quality and performance and ultra-low power consumption.

The incredibly small silicon footprint of 0.292mm² (400MHz @ 28nm) has leakage power GPU consumption of just 0.07mW. Implementing Think Silicon’s proprietary compression technologies ([TSC™FMB](#), [TSC™T](#)) limits memory power consumption to just 0.03mW (in DDR-less systems).

NEMA®|t features industry standard Open Graphics APIs capabilities, implements a fully configurable and programmable 3D graphics rendering engine, accelerates a comprehensive super-set of 2D graphics drawings, and has smart composition functions.

Application and Markets

NEMA®|t is, designed to support midrange till higher level quality wearable and IoT devices, such as smart watches, health and fitness applications, smart accessories, alarm systems, home automation, embedded-platforms etc. sporting an SoC with 32-bit MCU or MPU (e.g. ARM® Cortex®-M and A processors).

With NEMA®|t, you are be able to create compelling 3D Graphical User Interfaces (GUIs) and software applications with ultra-long battery life or lower power consumption at a significantly lower cost for power–memory–area constrained IoT devices.

For example, with core frequencies just as little as 80MHz, NEMA®|t delivers a fast and brilliant 3D UI experience in 420x420 resolution, without being limited to these parameters.

Performance per mWatt per Dollar

The benchmark our customers focused on

The NEMA®|GPU Series delivers stunning performance per silicon area per clock frequency. The NEMA®|t has been designed to perform favorably against these critical performance benchmarks. As a result NEMA® uses 87% less active and 98% less idle power and has a 4 times smaller silicon footprint, leading to significant cost reduction of about 88% per chip compared to the best solution available in the market. Targeting to the system level power

| tiny 3D GPU | NEMA® t-100 | NEMA® t-200 | NEMA® t-400 |
|--------------------------------------|-------------|-------------|-------------|
| GPU cores | 1 | 2 | 4 |
| Silicon area (mm ² @28nm) | 0.292 | 0.469 | 0.726 |
| Core clock (MHz @28nm) | 400 | 400 | 400 |
| Shader (GOPs) | 4.8 | 9.6 | 19.2 |
| Pixel Rate (Mpixel/sec) | 400 | 800 | 1600 |

consumption reduction, the design is complemented by high-quality 6bpp (bits-per-pixel) texture compression ([TSC™TX](#)), a real-time 4bpp frame-buffer compression ([TSC™FMB](#)) and Z-buffer compression techniques. Compression yields an enormous reduction of the power-hungry memory accesses and offloads system bus. Furthermore, it enables systems that use only internal on-chip memory eliminating the need for an external DDR. All those features lead to a massive battery life extension (up to 10 times) and to a significant cost reduction (BOM). The combined performance and cost advantages make NEMA®|t to a Performance–Power–Cost leader in the class of 3D GPU’s.

Features List


- Fully programmable engine with a VLIW instruction set
- Scalable to multiple cores
- DMA based Command lists to minimize CPU overhead
- Compression schemes
 - TSC™4 (4 bits per pixel)
 - TSC™6 / TSC™6a (6 bits per pixel without/with alpha)
 - Z-buffer compression
- 3D Rendering
 - Support for industry standard Open Graphics APIs
 - Perspective correct image projection
 - Z-Buffer (Early test, Late test)
- 2D drawing:
 - Pixel / Line drawing
 - Filled rectangles
 - Triangles (Gouraud Shaded)
 - Quadrilaterals
- Smart Composition
 - One pass composition
 - Hidden areas not read from memory
 - YUV layers are automatically processed without intermediate conversion
 - Video scaler
- Blit support
 - Rotation, Mirroring
 - Stretch (independently on x, y axis)
 - Source and/or destination color keying
 - Format conversions
 - RGB and YUV
 - Texture Wrapping (mirror, repeat, clamp, border color)
- Text rendering supports
 - A1 bitmap, A8 bitmap antialiased
 - Subsampled antialiased
- Color formats
 - 32/16/8 bit, with/out alpha, GreyScale, YUV, RGB, TSC™4, TSC™6 / TSC™6a.
 -
- Full Alpha blending
 - Programmable blending modes
 - Source/Destination color keying
- Texture mapping
 - Point sampling
 - Bilinear filtering

Architecture

NEMA®|t is a modular architecture and is available as one, two or four-core configurations. Its fixed point data path and instruction set architecture (ISA) are tailored to 3D GUIs acceleration and small display applications leading to substantial improvements in power consumption and silicon area.

NEMA®|t core includes VLIW and vector data processing and innovative low-level lightweight multi-threading for full hardware utilization, the key parameter for ultra-low power consumption and high performance by hiding the memory latency.

NEMA®|t features a smart IOMMU for easy integration while eliminating the unnecessary data traffic between host CPU and NEMA®|t.

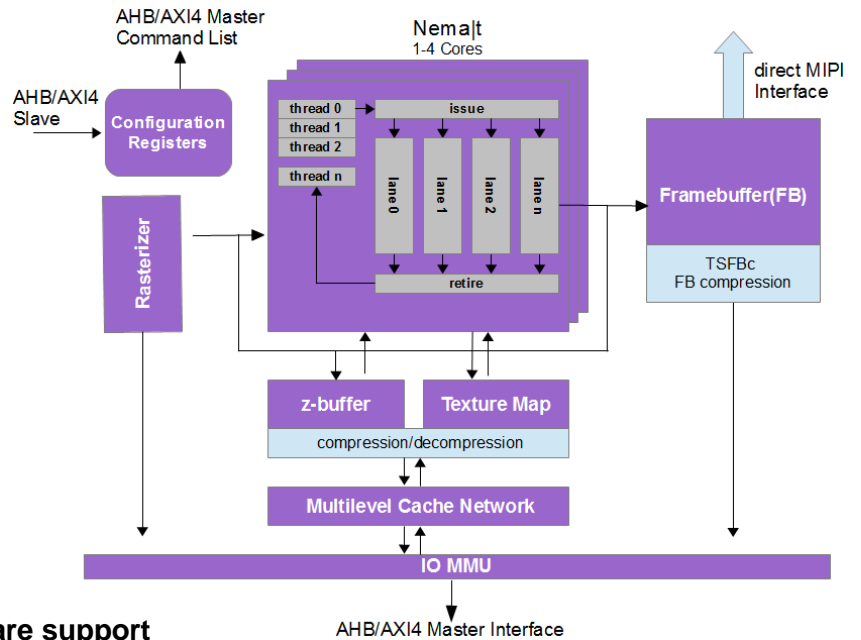

Software

- OS support
 - RTOS
 - Linux
 - Android
- Graphics API support
 - NEMA®|GFX
 - DirectFB, Qt
 - Industry standard Open Graphics APIs
- Software Emulators and Tools
 - NEMA®|SHADER-Edit
 - NEMA®|GUI-Builder
 - NEMA®|PIX-Presso
 - TSC™FB bit accurate emulator
- Graphics API library options:
 - Performance build: No logs Support
 - Debug build: logs enabled

Configuration Options

- # of Cores
- # of Thread
- IOMMU
- Caches
- Texture/ Z buffer
- FrameBuffer/Texture Compression
 - TSC™4, TSC™6, TSC™6a
- Z-Buffer Compression
- Master Interface
 - AMBA AHB 32bit
 - AMBA AXI4 32/ 64bit
- Slave Interface

Software support

NEMA®|t supports all major IoT operating systems and middleware like FreeRTOS, Linux and Android and come together with Software Libraries for 3D Graphics APIs. DirectFB support makes it ideal for software development with application and Graphic User Interface (GUI) creation frameworks, such as Qt and GTK+. A bare metal library of primitive graphics functions enables graphics development for embedded applications.

The software package comes together with a “Texture/frame-buffer compression scheme-Emulator”.

Integration/verification

The NEMA®|t GPU IP Platform is available in Verilog and easy to integrate and verify. NEMA®|t ASIC reference designs have been evaluated in various process technologies. NEMA®|t is designed with AMBA interfaces (AHB, AXI 32 or 64 bits) and embeds command lists for minimal CPU overhead. The core has been verified through extensive simulation and rigorous code coverage measurements. It comes together with a complete verification suite that compares reference images with rendered images.

Deliverables and Documentation

The deliverables include: complete set of synthesis and STA (Static Timing Analysis) scripts, OS drivers (for Linux, Android), graphics API software libraries (for DirectFB, Qt) and standalone bare drivers.

Documentation includes: IP manual, integration manual, software library manual including code samples, and demonstration platform application notes.

A reference design systems and demo-sets are available for platforms: Xilinx Zynq, Altera SoCkit.

General:

info@think-silicon.com
Sale inquiries
sales@think-silicon.com

www.think-silicon.com

Corporate Headquarters

Patras Science Park
 Rion Achaias
 Greece 26504
 Tel: + 30 2610 911543

North America

Ulli Mueller
 Toronto
 Canada
 Tel: + 1 647.824.2006

